



昆明康倍特输送带有限公司 KUNMING CONVEYOR BELT CO., LTD.


Address: Room 1602, Block B, Mo'er Building, No.60 Chuncheng Road, Kunming-650011, China
TEL: 0086 871 65136470, 65136474 FAX: 0086 871 65136492
Website: www.kmbelt.com.cn Email: kmbelt@163.com, sales@kmbelt.com.cn

TYPE

EHM160/1:0+1.0M/2.2BPU/AS

GENERAL CHARACTERISTICS:

ROTARY TEXTILE PRINTING

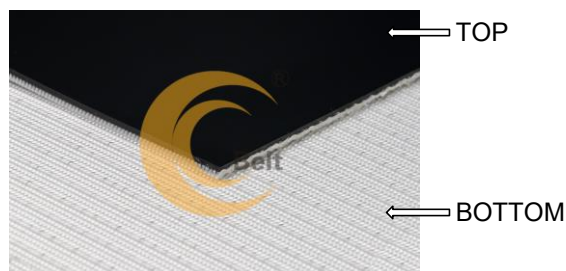

TECHNICAL CHARACTERISTICS :

Total Thickness	2.2 mm
No. of Plies	1
Fabric	High grade polyester
Weft	Rigid
Weight	2.6kg(s)/m ²
Working Temperatures	-10 °C to + 70 °C
1. Top cover	
Thickness	1.0 mm
Material	Polyurethane (PU)
Color	Black (B)
Surface	Glossy
Hardness	93 ShA
2. Internal layer(s)	
Material	
Color	
Fabric	
3. Bottom cover	
Thickness	-
Material	-
Color	Natural
Surface	Bare fabric
Hardness	-
Anti-static yarn	Yes

BELT TENSION :

Tensile Strength	160 N/mm
Max. Suggested Load	18 N/mm
Working load 1% elongation	20 N/mm

FRICTION COEFFICIENTS ON:


Smooth Stainless Steel	0.16
------------------------	------

REMARKS

Max. manufacturing width	3300mm
--------------------------	--------

MINIMUM PULLEY DIAMETERS:

Front Flexing	60 mm
Back Flexing	80 mm



CONVEYOR FRAME:

Horizontal Rollers	Yes
Slider bed	Yes, flat
Troughed application	No

SPECIAL CHARACTERISTICS:

Food grade	No
Oil resistant	Yes
Flame resistant	No
Surface antistatic	No
Cold resistant	No

JOINING INSTRUCTIONS :

Finger Joint	Yes
Welding temperature	160 °C ± 10 °C
Pressure	2 bar / 12min
Cooling	Cool immediately

Edited 01/25/24

We reserve the right to change any part of this specification without notification due to improvement or any other reasons.